



MAST ARM MOUNTED STREET NAME SIGNS

NOTES

1. Mounting brackets with steel straps shall be a stainless steel band and buckle system product or an approved equal. Mounting brackets shall be one bolt, flared leg; steel straps shall be 3/4" wide and 0.030" thick.
2. All signs shall be installed with horizontal edges level. Skewed windbeams are required only when the sign is mounted within 12" of the mast arm base (see Detail "A").

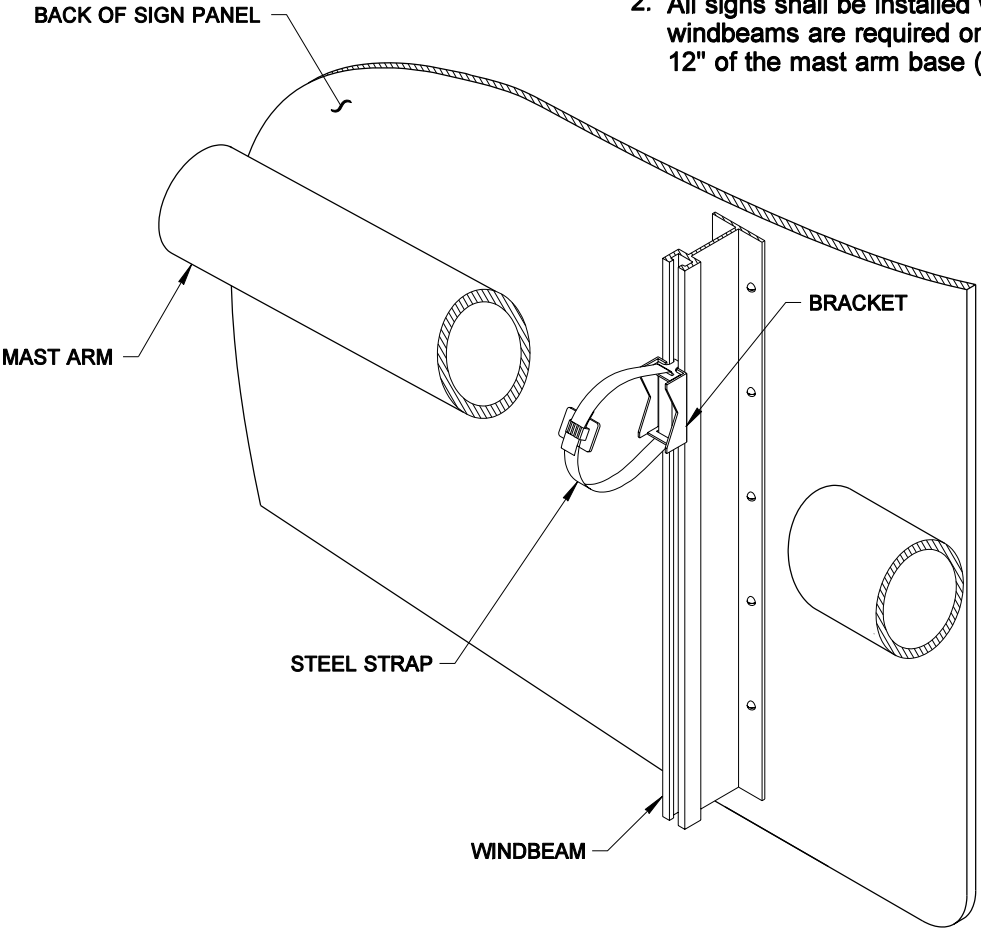

TYPICAL MAST ARM INSTALLATION

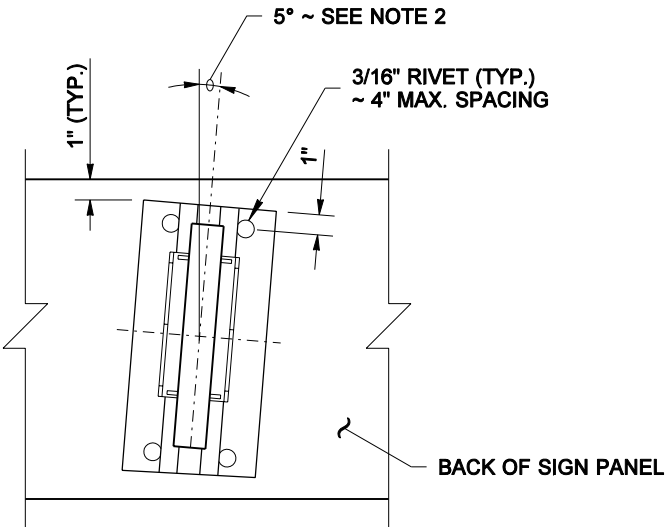

DETAIL A

TYPICAL FOR EACH CONNECTION



EXPIRES MAY 5, 2005

**SIGN INSTALLATION
ON SIGNAL AND
LIGHT STANDARDS
STANDARD PLAN G-9b**

SHEET 1 OF 2 SHEET

APPROVED FOR PUBLICATION

Harold J. Peterfeso

STATE DESIGN ENGINEER

02-09-05




DATE



Washington State Department of Transportation


NOTE: THIS PLAN IS NOT A LEGAL ENGINEERING DOCUMENT BUT AN ELECTRONIC DUPLICATE. THE ORIGINAL, SIGNED BY THE ENGINEER AND APPROVED FOR PUBLICATION, IS KEPT ON FILE AT THE WASHINGTON STATE DEPARTMENT OF TRANSPORTATION. A COPY MAY BE OBTAINED UPON REQUEST.

DIMENSIONS	
A	B
3' - 0"	9"
4' - 0"	1' - 0"

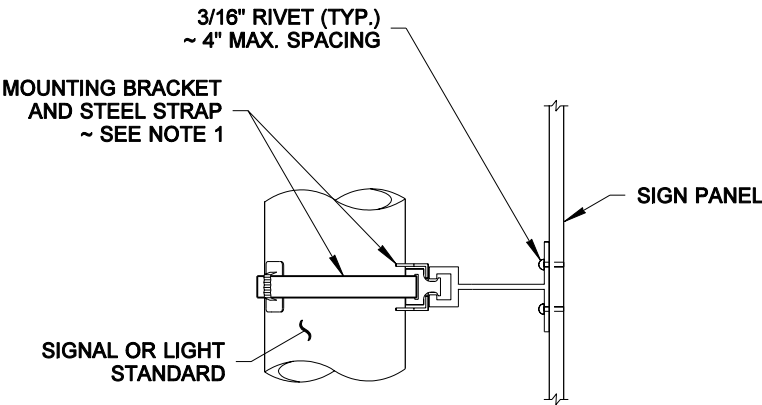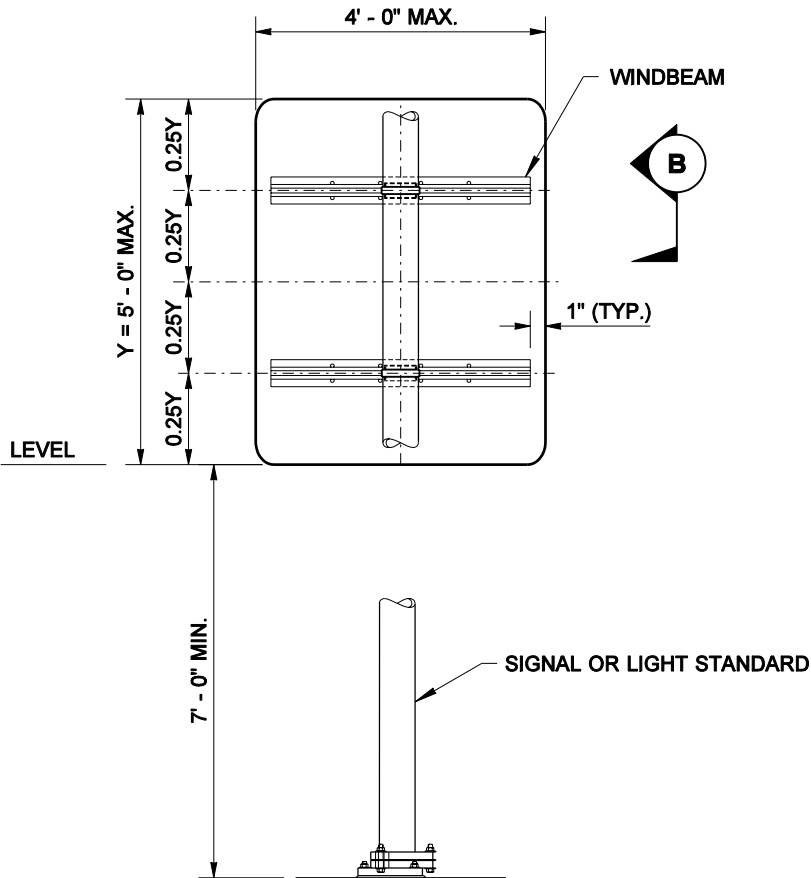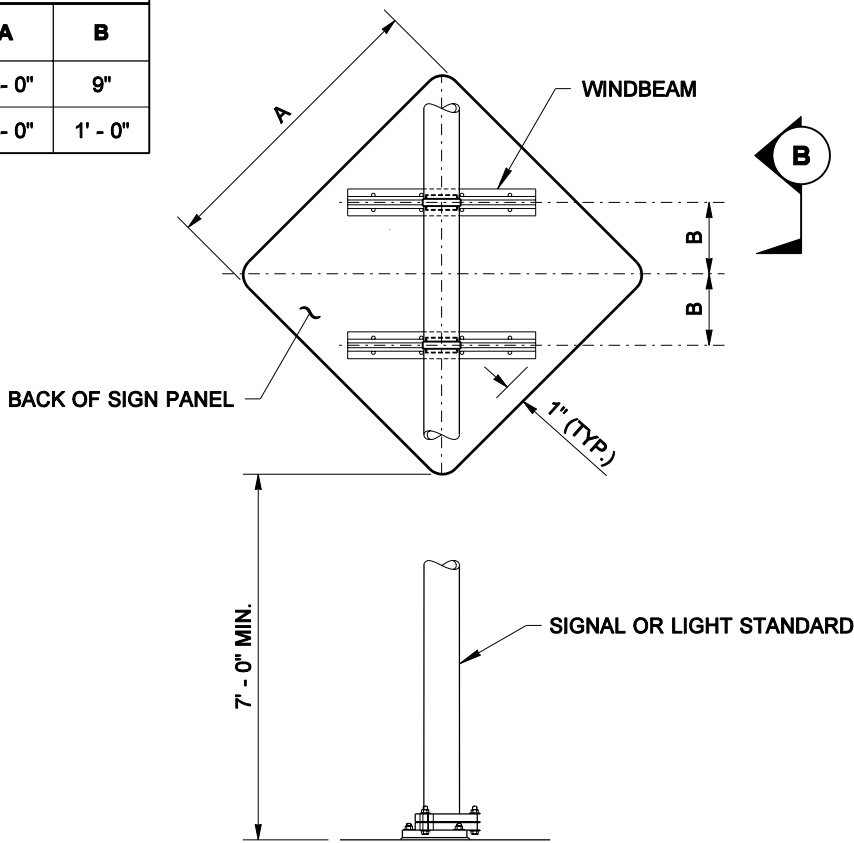

DETAIL VIEW B

SIGN INSTALLATION ON LIGHT STANDARD

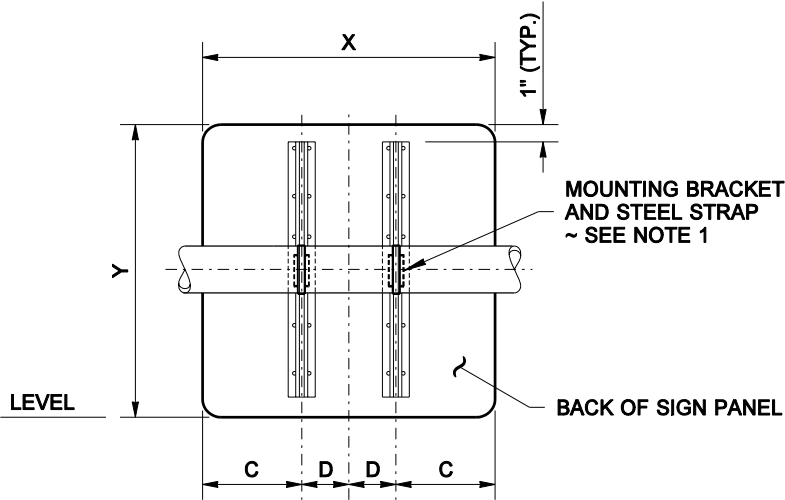

DIMENSIONS			
X	Y	C	D
3' - 0"	2' - 6"	1' - 0"	6"
3' - 0"	3' - 0"	1' - 0"	6"
4' - 0"	2' - 6"	1' - 3"	9"

MAST ARM MOUNTED LANE USE SIGNS



EXPIRES MAY 5, 2005

SIGN INSTALLATION
ON SIGNAL AND
LIGHT STANDARDS
STANDARD PLAN G-9b

SHEET 2 OF 2 SHEET

APPROVED FOR PUBLICATION

Harold J. Peterfeso 02-09-05

STATE DESIGN ENGINEER

DATE



Washington State Department of Transportation